

# BASIC BT 155 / WT 155

CENTRAL INLET FOR SIMULTANEOUS SUCTION OF DUST, SOLIDS AND LIQUIDS

MANUAL FILTER CLEANING DEVICE

TANGENTIAL INLET FOR BETTER DUST SEPARATION FROM THE FILTER



TWO-STAGE SIDE CHANNEL TURBINE



POLYESTER POCKET FILTER AVAILABLE:

- L - M - M ANTISTATIC CLASS
- 20.000 CM2 30.000 CM2 SURFACES

SECONDARY HEPA FILTER (OPTIONAL)



TANK QUICK RELEASE FOR FAST DISPOSAL




## BT 155

TANGENTIAL INLET FOR BETTER DUST SEPARATION FROM THE FILTER

BASIC BT 155 is the vacuum cleaner that combines power and reliability. Designed and built for constant and continuous use is critical for companies that need a good suction power for vacuuming non-specific dust or debris that can be fine dust.



### WORK EFFICIENCY BM 375

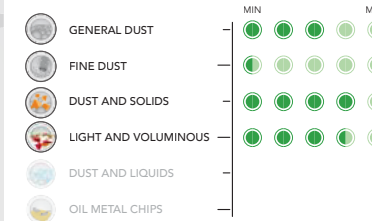

TYPE OF APPLICATION

POLVERE

DEGREE OF SPECIFICITY



### TECHNICAL DATAS

	BTP 155	BTS 155
MOTORIZATION	TURBINE	TURBINE
POWER	5,5 kW	5,5 kW
VOLTAGE	400 V ⚡	400 V ⚡
FREQUENCY	50-60 Hz	50-60 Hz
AIR FLOW	520 m3/h	320 m3/h
MAX DEPRESSION	320 mBar	530 mBar
VACUUM VALVE	250 mBar	450 mBar
CAPACITY	100 L	100 L
DIMENSIONS	100x60 h 140 cm	100x60 h 140 cm
WEIGHT	150 Kg	150 Kg

VOLTAGGI DISPONIBILI:  
220 V - 60 HZ • 480 - V - 60 HZ • 500 V - 60 HZ • 575 V - 60 HZ


## WT 155

CENTRAL INLET FOR SIMULTANEOUS SUCTION OF DUST, SOLIDS AND LIQUIDS

BASIC WT 155 is the vacuum that is applied in all areas for general aspirations of powders, solids and liquids. Its engine with side channel turbine 5.5kW makes it a reliable model for ongoing services and a safe investment to be entrusted with the daily cleaning of each company.



### WORK EFFICIENCY WM 375

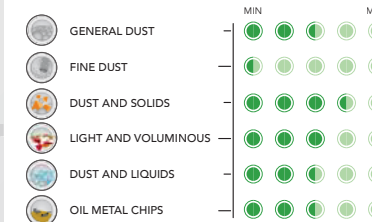

TYPE OF APPLICATION

DUST AND SOLIDS

DEGREE OF SPECIFICITY



### TECHNICAL DATAS

	WTP 155	WTP 155
MOTORIZATION	TURBINE	TURBINE
POWER	5,5 kW	5,5 kW
VOLTAGE	400 V ⚡	400 V ⚡
FREQUENCY	50-60 Hz	50-60 Hz
AIR FLOW	520 m3/h	320 m3/h
MAX DEPRESSION	320 mBar	530 mBar
VACUUM VALVE	250 mBar	450 mBar
CAPACITY	100 L	100 L
DIMENSIONS	100x60 h 140 cm	100x60 h 140 cm
WEIGHT	150 Kg	150 Kg

VOLTAGES AVAILABLE:  
220 V - 60 HZ • 480 - V - 60 HZ • 500 V - 60 HZ • 575 V - 60 HZ