

PRO ST BAG

TANGENTIAL INLET FOR BETTER DUST SEPARATION FROM THE FILTER

STORAGE CONTAINER

BIGGER REAR WHEELS


LONGOPAC® CONTINUOUS BAG COLLECTION SYSTEM 22 METERS




SIDE CHANNEL TURBINE



SEMI-AUTOMATIC FILTER CLEANING SYSTEM WITH A PNEU-MECHANICAL PISTON



SECONDARY HEPA FILTER (OPTIONAL)




M CLASS CONDUCTIVE ALUMINIZED PRIMARY CARTRIDGE FILTER

CYCLONE FOR INCREASED FILTER EFFICIENCY

Industrial vacuum cleaners ideal for the suction of dry dust and a continuous bag collection system LONGOPAC®.

WORK EFFICIENCY

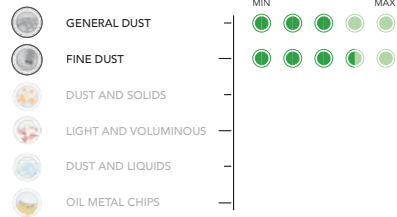

TYPE OF APPLICATION

DUST

TECHNICAL DATAS

PRO	ST 22 BAG	ST 3 BAG
MOTORIZATION	TURBINE	TURBINE
POWER	2,2 kW	3 kW
VOLTAGE	230 V	400 V
FREQUENCY	50 Hz	50-60 Hz
FILTER SHAKER	SEMI - AUTO	SEMI - AUTO
FILTER CLASS	18000 cm ²	18000 cm ²
STANDARD FILTRATION	M	M
FILTRATION OPTIONAL	M + HEPA	M + HEPA
AIR FLOW	320 m ³ /h	320 m ³ /h
MAX DEPRESSION	300 mBar	320 mBar
VACUUM VALVE	200 mBar	250 mBar
HARVESTING SYSTEM	LONGOPAC®	LONGOPAC®
DIMENSIONS	80x60 h 175 cm	80x60 h 175 cm
WEIGHT	107 Kg	107 Kg

VOLTAGES AVAILABLE: 200 V - 60 HZ • 220 V - 60 HZ • 480 V - 60 HZ • 575 V - 60 HZ

PRO STD

TANGENTIAL INLET FOR BETTER DUST SEPARATION FROM THE FILTER

STORAGE CONTAINER




SIDE CHANNEL TURBINE



SEMI-AUTOMATIC FILTER CLEANING SYSTEM WITH A PNEU-MECHANICAL PISTON



SECONDARY HEPA FILTER (OPTIONAL)



M CLASS CONDUCTIVE ALUMINIZED PRIMARY CARTRIDGE FILTER


CYCLONE FOR INCREASED FILTER EFFICIENCY

TANK QUICK RELEASE FOR FAST DISPOSAL



The filter characteristics of the STD models integrated with our cleaning system of semi-automatic filter create ideal industrial vacuum cleaners for all applications where there are large amounts of dust to be removed in any industrial environment or production process, reducing the time dedicated to cleaning and taking advantage of environments totally dedusted.

WORK EFFICIENCY

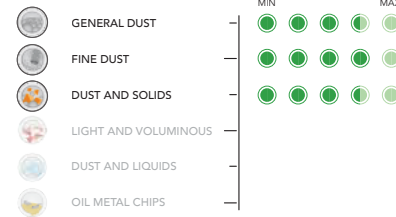

TYPE OF APPLICATION

DUST

TECHNICAL DATAS

PRO	STD 220	STD 300
MOTORIZATION	TURBINE	TURBINE
POWER	2,2 kW	3 kW
VOLTAGE	230 V	400 V
FREQUENCY	50 Hz	50-60 Hz
FILTER SHAKER	SEMI - AUTO	SEMI - AUTO
FILTER CLASS	22000 cm ²	22000 cm ²
STANDARD FILTRATION	M	M
FILTRATION OPTIONAL	M + HEPA	M + HEPA
AIR FLOW	320 m ³ /h	320 m ³ /h
MAX DEPRESSION	300 mBar	320 mBar
VACUUM VALVE	200 mBar	250 mBar
CAPACITY	75 L	75 L
DIMENSIONS	80x60 h 165 cm	80x60 h 165 cm
WEIGHT	90 Kg	90 Kg

VOLTAGES AVAILABLE: 200 V - 60 HZ • 220 V - 60 HZ • 480 V - 60 HZ • 575 V - 60 HZ

DEGREE OF SPECIFICITY



DEGREE OF SPECIFICITY

