

SWITCH FOR FORCED FILTER CLEANING  
 BIGGER REAR WHEELS  
 TANGENTIAL INLET FOR BETTER DUST SEPARATION FROM THE FILTER



2 BY-PASS COLLECTOR MOTORS

FULLY AUTOMATIC FILTER CLEANING  
 CONSTANT AND ENDLESS SUCTION  
 NR 2 HEPA FILTERS + PTFE MEMBRANE

TANK QUICK RELEASE FOR FAST DISPOSAL

SWITCH FOR FORCED FILTER CLEANING  
 TANGENTIAL INLET FOR BETTER DUST SEPARATION FROM THE FILTER  
 STORAGE CONTAINER



2 BY-PASS COLLECTOR MOTORS


FULLY AUTOMATIC FILTER CLEANING  
 CONSTANT AND ENDLESS SUCTION  
 NR 2 HEPA FILTERS + PTFE MEMBRANE

TANK QUICK RELEASE FOR FAST DISPOSAL

ICLEAN 220 is the ideal partner for all professionals who require excellent suction performance and excellent filtering capabilities. A concentration of power and reliability packed into an extremely robust tool, with limited dimensions. Finds its ideal application in construction employment, in bodywork or in any industry that need a practical use vacuum cleaner, good maneuverability for the suction of fine dust, whether it is connected to power tools, sanding or used as a simple tool.

The 235 ICLEAN, increased evolution compared to the more moderate 220 iclean stands for more filtering capabilities and greater capacity. The reinforced trolley from the previous one allows its use in industrial environments with the most demanding applications, especially those regarding the coupling of machines that generate large amounts of dust.

WORK EFFICIENCY

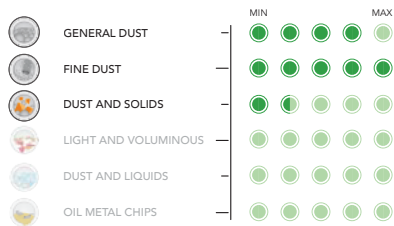

TYPE OF APPLICATION: FINE DUST


DEGREE OF SPECIFICITY: 4/5

TECHNICAL DATAS

iclean	220
MOTORIZATION	nr 2 By-pass
POWER	2200 W
VOLTAGE	230 V
FREQUENCY	50 Hz
FILTER SHAKER	AUTO
FILTER CLASS	HEPA
AIR FLOW	340 m <sup>3</sup> /h
MAX DEPRESSION	230 mBar
CAPACITY	20 L
DIMENSIONS	54X58 h 85 cm
WEIGHT	33 Kg

VOLTAGES AVAILABLE: 120 V - 60 HZ • 220 V - 60 HZ • 110 V - 50 HZ

WORK EFFICIENCY

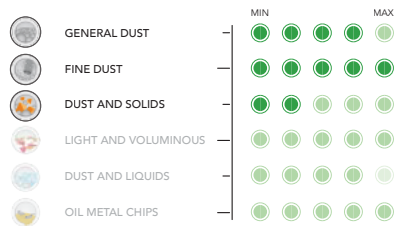

TYPE OF APPLICATION: FINE DUST

DEGREE OF SPECIFICITY: 4/5

TECHNICAL DATAS

iclean	235
MOTORIZATION	nr 2 By-pass
POWER	2200 W
VOLTAGE	230 V
FREQUENCY	50 Hz
FILTER SHAKER	AUTO
FILTER CLASS	HEPA
AIR FLOW	340 m <sup>3</sup> /h
MAX DEPRESSION	230 mBar
CAPACITY	35 L
DIMENSIONS	62X50 h 111 cm
WEIGHT	42 Kg

VOLTAGES AVAILABLE: 120 V - 60 HZ • 220 V - 60 HZ • 110 V - 50 HZ