



VACUUM CLEANERS - SPECIAL SOLUTIONS - HIGH REACH POINTS

KS 2/78 OPT FM SKYVAC INDUSTRIAL

POWER MAX

2400 W

WATER LIFT

3800

mmH₂O
Flowmix On

AIRFLOW

220

m³/h
Flowmix On

TANK CAPACITY


78 l



EXCLUSIVE FEATURES

- ▶ INNOVATIVE GASKET
- ▶ INDEPENDENT MOTORS WITH LIGHT SWITCHES
- ▶ SEALANT FLOATER & INTEGRATED ANTIFOAM SYSTEM
- ▶ TIPPING TROLLEY
- ▶ RELIABLE CONSTRUCTION FOR INTENSIVE USE
- ▶ DETACHABLE TANK AND SOLID CART
- ▶ METAL TANGENTIAL INLET
- ▶ BIG WHEELS WITH BRAKES

MOST FREQUENTLY USE

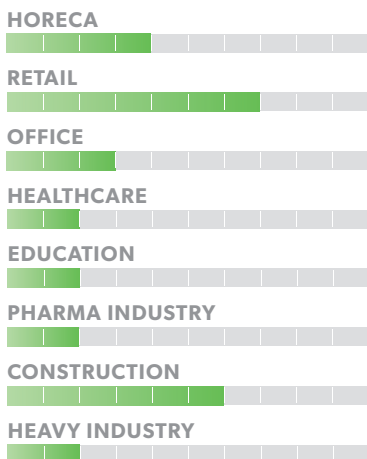

INNOVATIONS



LIGHTEST CARBON FIBER POLES



FLOWMIX



HIGH SPEED NEW GENERATION MOTORS

SPECS



SOLID CART WITH TIPPING TANK



FLOWMIX



CARTRIDGE PROTECTION

TECHNICAL DATA

KS 2/78 SKYVAC INDUSTRIAL

| | | |
|--------------------------------------------------------------------|--------------------|---------------------------|
| Code | | ASD015555 |
| PERFORMANCE | | |
| Usage | | WET & DRY |
| Motor | | 2x1 stage |
| Power | W | 2000-2400 max |
| Voltage | V | 220-240 |
| Water lift | mmH ₂ O | 2470 FM OFF 3800 FM ON |
| Airflow | m ³ /h | 420 FM OFF 220 FM ON |
| Tank Capacity/Material | l | 78/steel |
| Cable length | m | 8,5 |
| Sound Pressure Level (EN 60704-1; EN 60704-2-1; IEC 60335-2-69) | dB(A) | 74 |
| Diameter of flexible hose | mm | 50 |
| Dimensions (LxWxH) | mm | 700x580 X1100 |
| Weight | kg | 42 |

STANDARD EQUIPMENT

CODE: FTDP44260
POLY CARTRIDGE



CODE: MPVR28723
FASTENING PLASTIC RING



CODE: TBFX00820
FLEXIBLE HOSE 6 m
Ø50 mm



CODE: KTRI04657
HOSE CUFF
(FLEXI HOSE TO POLE)



OPTIONAL ACCESSORIES

Set up your vacuum cleaner with many other accessories (look at page 190-191)